

CONTROL DAMPERS - 5 YEAR WARRANTY



CD-42

- Single and opposed blade action available.
- 6" x 16 gauge galvanized steel blades.
- 1/2" dia. hex plated steel blade shafts.
- In-jamb linkage.
- Standard nylon bushings.
- 1/2" round x 6" drive axle with bearing.
- Dampers supplied 1/4" undersized.
- Optional electric and pneumatic actuators in stock (see accessory reference.)
- Optional manual locking quadrant (see accessory reference.)

Size	Stock#	List Price
6" x 6"	W-11917	\$80.00
8" x 8"	W-11918	\$80.00
10" x 10"	W-11919	\$94.00
12" x 12"	W-11920	\$94.00
14" x 14"	W-11921	\$121.00
16" x 16"	W-11922	\$121.00
18" x 18"	W-11923	\$152.00
20" x 20"	W-11924	\$152.00
22" x 22"	W-11925	\$189.00
24" x 24"	W-11926	\$189.00



CD-10R

- 6" x 22 gauge sleeve and blade.
- Double beaded for strength.
- Easy duct connection.
- 22 gauge galvanized blade with center "V".
- 3/8" square zinc plated shafts with tight sealing nylon bushings.
- Manual locking quadrant standard with 1-1/2" stand-off bracket.
- No rattles.


Size	Stock#	List Price
6"	W-11879	\$59.00
7"	W-12392	\$63.00
8"	W-11880	\$63.00
9"	W-12393	\$68.00
10"	W-11881	\$68.00
12"	W-11882	\$74.00
14"	W-11883	\$86.00
16"	W-11884	\$92.00
18"	W-11885	\$107.00
20"	W-11886	\$119.00
22"	W-11887	\$133.00
24"	W-11888	\$148.00



CD-25R

- 12" x 20" gauge galvanized steel sleeve.
- Double beaded for strength and easy duct connection.
- Double membrane steel blade (14 ga. equivalent).
- Polyethylene blade gasket provides full diameter seal.
- 1/2" round diameter steel blade shafts.
- Leakage less than 1% at 2" of static pressure.
- Maintains seal at 4" of static pressure.
- Optional electric and pneumatic actuators in stock.
- Optional manual locking quadrant (see accessory reference.)

Size	Stock#	List Price
6"	W-11889	\$137.00
8"	W-11890	\$142.00
10"	W-11891	\$152.00
12"	W-11892	\$162.00
14"	W-11893	\$174.00
16"	W-11894	\$185.00
18"	W-11895	\$197.00
20"	W-11896	\$214.00
22"	W-11897	\$240.00
24"	W-11898	\$259.00

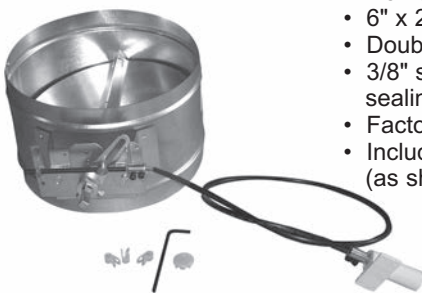

RCS-10R

- Remote controlled cable operated balancing damper.
- 6" x 22 gauge galvanized steel blade and sleeve.
- Double beaded for strength.
- 3/8" square zinc plated steel blade shafts with tight sealing nylon bushings.
- Factory assembled (no field assembly required.)
- Includes 36" cable and remote operator (as shown) (longer lengths available.)

Size	Stock#	List Price
6"	W-12380	\$160.00
7"	W-12381	\$160.00
8"	W-12382	\$164.00
9"	W-12383	\$164.00
10"	W-12384	\$170.00
12"	W-12385	\$176.00
14"	W-12386	\$187.00
16"	W-12387	\$193.00
18"	W-12388	\$215.00
20"	W-12389	\$220.00
22"	W-12390	\$234.00
24"	W-12391	\$249.00
Field Mt. Kit	W-12395	\$125.00
Extra Cable	W-12377	\$3.00/FT
Ex. Insulation	W-12378	*

* Included with W-12377

Accessory Reference



Damper Accessories - pg. 8



Actuators - pg. 9-10



Quick Ship Program - pg. 2